


Terrestrial high-definition digital set-top box specifications

Model: DV6711-IS

Product Pictures:

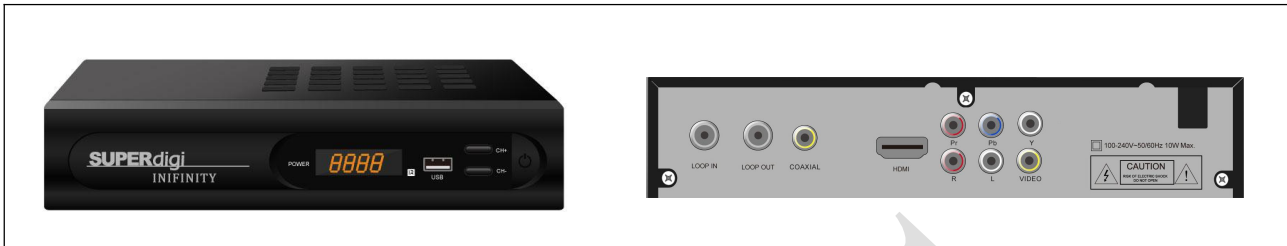

General Features:

GENERAL	Standards
ISDB-T Compliant, Full Seg	S
Sensitive Tuner with Loop-Through	S
PAL, PAL-M, PAL-N, NTSC	S
Variable aspect ratio(4:3,16:9) with PAN&SCAN vector or letter BOX option	S
Output Resolution: Auto, 480i/p, 576i/p, 720p, 1080i/p	S
Storing memory: 300 carriers, 2000 channels	S
Favorite group and parental lock supported.	S
Supported programmer lock, delete, move, rename, skip	S
Supported multi-language menu (English, Portuguese and Spanish)	S
Multi-language audio	S
Multi-language Subtitle output	S
Closed-caption	S
7days Electronic Program Guide(EPG)	S
Two Games	S
USB 2.0 Interface	S
Software upgrade:	S
Can upgrade by RS232 / OTA / USB	S
Timer:	S
Supported 8 timers	S
Supported record timer event.	S
Supported customized sleep time.	S
Supported customized time to jump the designated program	S
USB(FAT, FAT32 and NTFS)	S
Rename, delete PVR files	S
Supported music files: MP3 , OGG , FLAC	S
Music player: Supported Play/Pause/Stop/Jump/Next/Previous	S
Supported movie files: avi, mkv, mp4, mpg, tp, trp, ts, flv, dat	S
Media player: Supported video loop ,FF/FB and Pause	S
Supported picture files: bmp, jpg, jpeg, jpe	S
Picture player: Supported rotate and various slides effects	S
USB PVR:(FAT, FAT32 and NTFS)	S
Record and playback stream files: Recording current FTA channel	S

Specifications:

ISDB-T Front End	Standards
Input Frequency: (VHF)177~213, (UHF)473~803	S
Input Level: (16QAM)-89 dBm~10 dBm (64QAM)-83 dBm~10 dBm	S
Input Impedence: 75 Ω	S
Demodulation: 16QAM, 64QAM, QPSK, DQPSK.	S
FEC: 1/2, 2/3, 3/4, 5/6, 7/8, Automatic	S
ISDB Standard: ISDB-T	S
VIDEO	Standards
Standard: ISO/IEC 13818-2	S
MPEG-2, MP@HL, AVC/H.264, HP@L4.1	S
Aspect Ratio: 4:3, 16:9	S
Video Full Resolution: 1920×1080i and 1280×720p for HD video, 720×480i, 720 × 480p for SD video, MPEG-1, MPEG-2 and MPEG-4 decode for SD resolution, MPEG4 AVC/H.264 decode up to 720p 1080i and 1080P	S
Video Format: PAL, PAL-M, PAL-N, PAL-NC, NTSC	S
HDMI output with upscale supporting up to 480i, 480p, 720p&1080i 50Hz, 720p&1080i 60Hz,1080P	S
Host Supplied Audio/Video: I & P frame support	S
Format conversion: Pan & Scan, Letter Box, Pillar Box	S
AUDIO	Standards
Standard: ISO/IEC 13818-3	S
Decoding. MPEG-2 layer I & II, MPEG-4 AAC and MPEG4 AAC-HE(AAC+), LPCM up to 48 KHz	S
Sampling Frequency: 32, 44.1, 48KHz	S
Audio Output Impedance: Low	S
Output Mode: Mono, Stereo, Left, and Right	S
A/V OUTPUT	Standards
Video De-emphasis: CCIR REC. 4051-1.625 Lines	S
Video Bandwidth: 5.6MHz	S
Video Output Impedence: 75 Ω	S
Video Output Level: 1.0Vp-p	S
Audio Output Frequency: 20Hz~20KHz	S
PROCESSOR	Standards
Chipset: Ali M3S11	S
Flash Memory: 4MB	S
DDR3 Memory: 128MB*1	S
Tuner:MXL603	S
FRONT PANEL	Standards
IR Receiver: 38KHz	S
Logo	S
Display 4 Digit, 7segment(Clock in standby mode) LED	S

USB port	S
3 Keys (Power, CH-, CH+)	S
REAR PANEL	Standards
ISDB-T Antenna input and output F-connector	S
Baseband video: CVBS(RCA)	S
Stereo Audio: Variable volume(2*RCA, I.E.1 Left& 1 Right)	S
Components output: YPbPr	S
HDMI output	S
D-Audio	S
Power switch	S
OTHER	Standards
Power Supply: Adaptor, Input AC 100~240v, 50/60Hz,	S
Power Consumption: 10Wmax	S
Ambient Operation Temperature: 0~40°C	S
Product size: 188 mm (length) X 120mm (width) ×38mm (height)	S
Packing size: 230 mm (length) X 180 mm (width) ×60mm (height)	S
ACCESSORIES	Standards
RCU Category, IR(Carrier 38KHz)	S
RCU batteries: 1.5V,AAA*2	R
RCA cable 1.2m 3to3	S
HDMI cable 1.5m	R
External sucker antenna, F type, 1.5m	R
Manual(English, Spanish, Portuguese)	S

S: Standard features

R: Customer requirement

NO: Not required

N/A: Not available

Email: contact@sdmctech.com

Tel: 86-755-86016429

Website:<http://www.sdmctv.com/>